

TECHNICAL DATA SHEET

Doc No – Ab/TDS/ GLP-172
Rev No: 06 Date- 05/2024-25

Abdos Labtech Pvt. Ltd.
Burette Clamp, PP

Valid for Catalog No. P70601, P70602

SRN (Single Registration Number): IN-MF-000022272

1. Description/Specification

1.1 Description: Burette Clamp, PP

- 1.1.1 Burette clamps are used to hold burette, test tubes etc.
- 1.1.2 Completely corrosion proof as it is molded in polypropylene.
- 1.1.3 Spring loaded jack in the middle provides grip to the burette & prevents it from slipping.
- 1.1.4 Two tapered wedges are provided to ensure firm on the rods.
- 1.1.5 Available in both single & double clamp.

1.2 Design: Burette Clamp, PP

1.3 Performance Specifications:

Code	Places	No. per Case
P70601	Single	6
P70602	Double	6

1.4 Material:

- 1.4.1 PP- Polypropylene (PP), confirm US FDA 21CFR
- 1.4.2 Free from Heavy metals, It is safe to use in contact with food stuff, Pharmaceuticals & drinking water

TECHNICAL DATA SHEET

Doc No – Ab/TDS/ GLP-172
Rev No: 06 Date- 05/2024-25

Abdos Labtech Pvt. Ltd.
Burette Clamp, PP

1.4.3 Product is manufactured without the use of Raw Materials of animal origin. Therefore BSE/TSE issue does not concern this product to the best of our knowledge. No materials containing latex or natural rubber are used in the Manufacturing, handling & packaging process for this product.

1.5 Color: White

1.6 Quality control: Products are manufactured, inspected and found to be in compliance with product & quality specification requirements as documented in ISO 9001:2015 & 13485:2016 Quality Management System. Testing of various characteristics in accordance with the valid specification, inspection reviewed & signed for product release amendments.

1.7 Basic Features

1.7.1 Made up of High pure virgin Polypropylene (PP)

1.7.2 Temperature range: -80⁰C to +121⁰C

1.7.3 Autoclavability: Yes, Autoclavable at 15 psi and 121⁰C for 20 minutes

1.7.4 Chemical resistance: See website (www.abdoslifesciences.com)

1.7.5 Manufactured in Aseptic Environment

1.7.6 Intended use: Widely used in scientific studies of molecular biology, clinical chemistry, biochemistry and any type of scientific laboratory.

Autoclaving Guideline for Plastics

All plastic consumables are autoclavable at 121⁰C for 20 minutes, 15 psi/1atm. Do not use a dry cycle as this may cause deformation or weakening of the plastic. Allow temperature within the autoclave to return to at least 50⁰C before removing product.

TECHNICAL DATA SHEET

Doc No – Ab/TDS/ GLP-172
Rev No: 06 Date- 05/2024-25


Abdos Labtech Pvt. Ltd.
Burette Clamp, PP

Instruction for Use

Product can be used for food contact also.
Storage temp. Max 30°C
Before using the product check crackness etc.
Check all the information printed on pouches or boxes.
Always wear gloves while handling specimens.

WARNING

DO NOT store strong oxidizing agents.
DO NOT place any plastic labware in a flame.
DO NOT mix any chemicals that may result in a thermic reaction, which can cause product failure
Consult local fire codes prior to storage of flammable liquids.

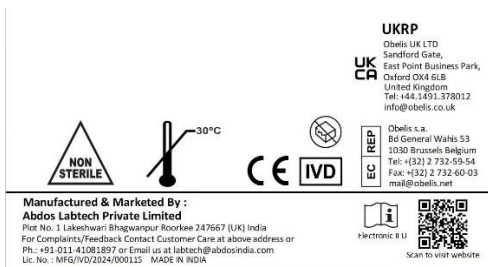

TECHNICAL DATA SHEET

Doc No – Ab/TDS/ GLP-172
Rev No: 06 Date- 05/2024-25

Abdos Labtech Pvt. Ltd.
Burette Clamp, PP

Quality Manager

Abdos Labtech Private Limited

Employee Code 30110

