

Technical Data Sheet

Doc No – Ab/TDS/Cryo-24

Rev No : 04 Date 01/2021

TECHNICAL DATA SHEET

Abdos Labtech Pvt. Ltd.

Cryo Vial Internal Threaded Sterile with Silicon Seal, PP

Valid for Cat. No. P60108, P60109, P60110, P60112, P60113

1. Description/Specification

1.1 Description: Disposable Cryo vials, DNase, RNase, Human DNA, ATP & Pyrogen Free, IVD certified

1.2 Design:

1.2.1 Vials : Available in Star Foot, Round Bottom with Internal Thread

1.2.3 Cap: Separate Cap with threads (PP) along with Silicon Washer

1.3 Performance Specifications:

1.3.1 Vial Volume: 1.0 ml, 1.8 ml and 4.5 (\pm 0.1 ml)

1.3.2 Vial Size :

| Code | Capacity (mm) | Outer Diameter (mm) | Height | No. Per Case | Self Standing | Bottom |
|-------------|----------------------|----------------------------|---------------|---------------------|----------------------|---------------|
| P60108 | 1.0 | 12.3 | 41.2 | 1000 | Yes | Star Foot |
| P60109 | 1.8 | 12.3 | 47.5 | 1000 | Yes | Star Foot |
| P60110 | 1.8 | 12.3 | 46.2 | 1000 | No | Round |
| P60112 | 4.5 | 12.3 | 90.3 | 500 | Yes | Star Foot |
| P60113 | 4.5 | 12.3 | 89 | 500 | No | Round |

1.4 Material:

1.4.1 **Tube:** Polypropylene (PP), Hydrophobic **Cap-PP**

1.4.2 Confirm US FDA 21CFR

1.4.3 Complies with requirement accordance with article of regulation (EC) No. 1907/2006 and its amendments.



Shiv Ganga Industrial Estate,
Plot no.1 Lakeshwari, Bhagwanpur,
Roorkee – 247667 Uttarakhand, India
An ISO 9001 ,13485, 14001 & CE Certified
A Division of Abdos

Regd. Office:
13A, Government Place (East)
Kolkata – 700069, India
GST : 05AAGCA8605A1Z7

P : +91 (0) 1332 235277
E : labtech@abdosindia.com
W: www.abdoslifesciences.com
CIN : U85100WB2008PTC123903

Technical Data Sheet

1.4.4 Complies with the requirement of European Pharmacopoeia, 7th edition (2011) & its supplements 7.5 (07/2012) monographs 3.2.2 Plastic Containers and closures for Pharmaceutical use.

1.4.5 The product has passed the USP testing including class VI tests & has been assigned the FDA Drug master file DMF 12123

1.4.6 Materials has successful passed the biological tests according to ISO 10993 external communication devices for indirect blood contact for Prolonged period.

1.4.7 Free from Heavy metals, RoHS Free according to meets relevant requirements of EU regulations 1935/2004/CE, 2002/95/EC as amended, UE 10/2011 as amended. EU CONEG & it's following amendments. It is safe use in contact with food stuff, Pharmaceuticals & drinking water

1.4.8 Product is manufactured without the use of Raw Materials of animal origin Therefore BSE/TSE issue does not concern this product to the best of our Knowledge. No materials containing latex or natural rubber are used in the Manufacturing, handling & packaging process for this product.

1.5 Color:

Translucent

1.6 Sterilization:

Sterile catalog number from this lot have been pre-sterilizes and dosimetrically released based on ANSI/AAMI/ISO 11137 *Sterilization of healthcare products-Requirements for validation and routine control- Radiation sterilization*. The product has been sterilized with Co-60 Gamma Radiation. SAL 10^{-6}

1.7 Quality control:

Product are manufactured, inspected and found to be in compliance with product & quality specification requirements as documented in ISO 9001:2015 & 13485:2016 Quality Management System. Testing of various characteristics in accordance with the valid specification, inspection reviewed & signed for product release.

1.8 Other information:

Recommended for single use only

2. Basic Features

2.1 Temperature range : Tube : -196 °C to + 121 °C (Can withstand in liquid nitrogen with standard procedure, recommended to store in vapor phase of liquid nitrogen).

2.2 Autoclavability: Autoclavable at 15 psi and 121 °C for 20 minutes (Caps & Vials)



Shiv Ganga Industrial Estate,
Plot no.1 Lakeshwari, Bhagwanpur,
Roorkee – 247667 Uttarakhand, India
An ISO 9001 ,13485, 14001 & CE Certified
A Division of Abdos

Regd. Office:
13A, Government Place (East)
Kolkata – 700069, India
GST : 05AAGCA8605A1Z7

P : +91 (0) 1332 235277
E : labtech@abdosindia.com
W: www.abdoslifesciences.com
CIN : U85100WB2008PTC123903

Technical Data Sheet

2.3 Leak Test at 635 mm Hg with Cap fitted: No leakage

2.4 Large White frosted portion for easy writing & silk screen accurate graduation for sample identification.

2.5 These Cryo Vials have silicon washer 'O' ring for secure seal.

2.6 Star Foot Bottom base helps in single hand operation.

2.7 Secure tamper evident packaging along with self-stand Zipper pouch.


2.8 No dicolorization after sterilizing.

2.9 Manufactured in Clean room ISO Class 8 (100,000)

3.0 Chemical resistance: see website (www.abdoslifesciences.com)

Autoclaving Guideline for Plastics

All plastic consumables are autoclavable at 121⁰C for 20 minutes, 15 psi/1atm. Do not use a dry cycle as this may cause deformation or weakening of the plastic. Allow temperature within the autoclave to return to at least 50⁰C before removing product.

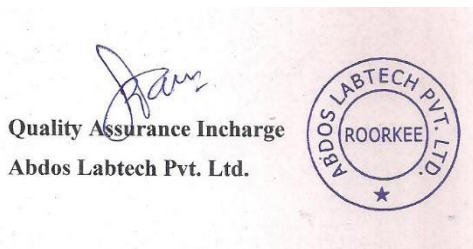

Shiv Ganga Industrial Estate,
Plot no.1 Lakeshwari, Bhagwanpur,
Roorkee – 247667 Uttarakhand, India
An ISO 9001 ,13485, 14001 & CE Certified
A Division of Abdos

Regd. Office:
13A, Government Place (East)
Kolkata – 700069, India
GST : 05AAGCA8605A1Z7

P : +91 (0) 1332 235277
E : labtech@abdosindia.com
W: www.abdoslifesciences.com
CIN : U85100WB2008PTC123903